


CS形 Cut Core 寸法表

型名	各部寸法 (mm)							平均磁路長 ℓ (cm)	実効断面積 Ae (cm ²)	公称重量 m (kg)
	a	b	c	d	e	f	r			
CS- 6.3	10 ±0.4	11 -0	33 -0	20 ^{+0.5} / ₋₀	31 +1.0	53 +2.0	1.5 +0	11.7	1.92	0.172
CS- 8	11 ±0.5	13 "	30 "	20 "	35 "	52 "	1.5 "	11.8	2.11	0.191
CS- 10	11 "	13 "	40 "	20 "	35 "	62 "	1.5 "	13.8	2.11	0.223
CS- 16A	11 "	13 "	40 "	25 "	35 "	62 "	1.5 "	13.8	2.64	0.279
CS- 16B	11 "	13 "	50 "	25 "	35 "	72 "	1.5 "	15.8	2.64	0.319
CS- 20	11 "	13 "	50 "	30 "	35 "	72 "	1.5 "	15.8	3.17	0.383
CS- 25	13 "	15 "	56 "	25 "	41 +2.0	82 +2.7	2.0 "	17.9	3.12	0.428
CS- 32	13 "	15 "	56 "	30 "	41 "	82 "	2.0 "	17.9	3.74	0.514
CS- 40	13 "	15 "	56 "	35 ^{+1.0} / ₋₀	41 "	82 "	2.0 "	17.9	4.37	0.599
CS- 50	16 "	20 "	70 "	25 ^{+0.5} / ₋₀	52 "	102 +3.5	2.0 "	22.7	3.84	0.666
CS- 63	16 "	20 "	70 "	30 "	52 "	102 "	2.0 "	22.7	4.61	0.800
CS- 80	16 "	20 "	70 "	40 ^{+1.0} / ₋₀	52 "	102 "	2.0 "	22.7	6.14	1.070
CS- 100	16 "	20 "	70 "	45 "	52 "	102 "	2.0 "	22.7	6.91	1.200
CS- 125	19 "	25 "	83 "	35 "	63 "	121 "	3.0 "	27.1	6.38	1.320
CS- 160	19 "	25 "	83 "	40 "	63 "	121 "	3.0 "	27.1	7.30	1.510
CS- 200	19 "	25 "	83 "	50 "	63 "	121 "	3.0 "	27.1	9.12	1.890
CS- 250	19 "	25 "	90 "	60 "	63 "	128 "	3.0 "	28.5	10.90	2.380
CS- 320	22 "	35 "	85 "	50 "	79 +2.4	129 "	3.0 "	30.4	10.60	2.460
CS- 400	22 "	35 "	85 "	65 "	79 "	129 "	3.0 "	30.4	13.70	3.190
CS- 500	25 "	40 "	85 "	55 "	90 "	135 "	3.0 "	32.3	13.20	3.270
CS- 630	25 "	40 "	85 "	70 "	90 "	135 "	3.0 "	32.3	16.80	4.160
CS- 800A	25 "	40 "	85 "	85 "	90 "	135 "	3.0 "	32.3	20.40	5.050
CS- 800B	30 "	40 "	95 "	85 "	100 "	155 +4.6	3.0 "	35.9	24.50	6.720
CS- 1000	33 "	40 "	105 "	85 "	106 +2.5	171 +5.0	3.0 "	38.9	26.90	8.000

※ご希望に応じた製品の製造が可能です。素材、形状、寸法をご指定ください。

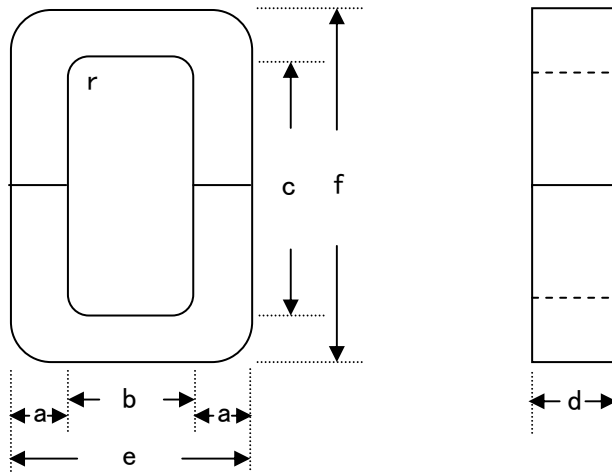


SL形 Cut Core 寸法表

型名	各部寸法 (mm)							平均磁路長 ℓ (cm)	実効断面積 Ae (cm ²)	公称重量 m (kg)
	a	b	c	d	e	f	r			
SL- 1700	37 ±0.5	45 -0	125 -0	80 ^{+1.0} ₋₀	119 +3.5	199 +5.0	3 +0	45.1	28.4	9.8
SL- 2300	40 ±1.0	45 "	125 "	100 "	125 "	205 "	3 "	46.0	38.4	13.5
SL- 3800	50 "	71 -0.5	120 "	90 "	171 "	220 "	3 "	53.4	43.2	17.6
SL- 4600	50 "	74 "	130 "	95 "	174 "	230 "	3 "	56.0	45.6	19.5
SL- 6200	50 "	75 "	165 "	100 "	175 "	265 "	3 "	63.2	48.0	23.2
SL- 7500	50 "	75 "	200 "	100 "	175 "	300 "	3 "	70.2	48.0	25.8

SC形 Cut Core 寸法表

型名	各部寸法 (mm)							平均磁路長 ℓ (cm)	実効断面積 Ae (cm ²)	公称重量 m (kg)
	a	b	c	d	e	f	r			
SC- 1	5.5 ±0.5	8 -0	25 -0	10 ^{+1.0} ₋₀	19 +1.5	36 +2.0	2 +0	8.33	0.53	0.034
SC- 2	8 "	10 "	30 "	10 "	26 "	46 "	2 "	10.51	0.77	0.062
SC- 3	10 "	14 "	40 "	10 "	34 "	60 "	2 "	13.94	0.96	0.102
SC- 4	10 "	16 "	45 "	15 "	36 ^{+2.5}	65 "	2 "	15.34	1.44	0.169
SC- 5	10 "	18 "	50 "	20 "	38 "	70 "	2 "	16.74	1.92	0.246
SC- 6	10 "	20 "	55 "	20 "	40 "	75 "	3 "	18.14	1.92	0.266
SC- 7	15 "	20 "	55 "	20 "	50 "	85 ^{+3.5}	3 "	19.71	2.88	0.434
SC- 8	17.5 "	25 "	70 "	20 "	60 "	105 "	3 "	24.50	3.36	0.630
SC- 9	20 "	25 "	70 "	20 "	65 "	110 "	3 "	25.28	3.84	0.743
SC- 10	18 "	30 "	90 "	25 "	66 "	126 "	3 "	29.65	4.32	0.980
SC- 11	20 "	30 "	90 "	25 "	70 "	130 "	3 "	30.28	4.80	1.112
SC- 12	20 "	35 "	100 "	30 "	75 "	140 "	3 "	33.28	5.76	1.466
SC- 13	25 "	35 "	100 "	30 "	85 "	150 "	3 "	34.85	7.20	1.920
SC- 14	30 "	40 "	110 "	30 "	100 "	170 ^{+5.0}	3 "	39.42	8.64	2.606
SC- 15	30 "	45 "	120 "	40 "	105 "	180 "	4 "	42.42	11.52	3.738
SC- 16	40 "	50 "	140 "	40 "	130 ^{+3.5}	220 "	4 "	50.56	15.36	5.941
SC- 17	40 "	50 "	140 "	50 "	130 "	220 "	4 "	50.56	19.20	7.426
SC- 18	50 ±1.0	60 -0.5	160 "	50 "	160 "	260 "	4 "	59.70	24.00	10.961
SC- 19	50 "	65 "	180 "	60 "	165 "	280 "	4 "	64.70	28.80	14.255
SC- 20	50 "	70 "	180 "	80 "	170 "	280 "	4 "	65.70	38.40	19.300
SC- 21	50 "	75 "	200 "	100 "	175 "	300 "	4 "	70.70	48.00	25.800

※ご希望に応じた製品の製造が可能です。素材、形状、寸法をご指定ください。

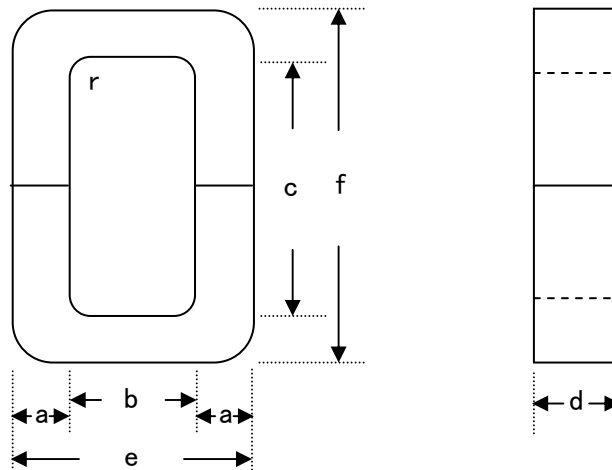

EC形 Cut Core 寸法表

型名	各部寸法 (mm)							実効断面積 Ae (cm ²)	公称重量 m (kg)
	a	b	c	d	e	f	r		
EC- 1	20 ±0.5	25 -0	70 -0	30 +0.5	110 +3.0	110 +3.0	3 +0	5.76	1.80
EC- 2	20 "	30 "	80 "	35 "	120 "	120 "	3 "	6.72	2.36
EC- 3	20 "	35 "	90 "	40 "	130 "	130 "	3 "	7.68	2.99
EC- 4	25 "	40 "	90 "	40 "	155 +4.5	140 "	3 "	9.60	4.06
EC- 5	28 "	45 "	100 "	50 "	174 "	156 +4.0	3 "	13.40	6.36
EC- 6	30 "	45 "	120 "	50 "	180 "	180 "	4 "	14.40	7.49
EC- 7	35 "	55 -0.5	140 "	55 "	215 "	210 "	4 "	18.50	11.40
EC- 8	40 "	60 "	160 "	60 "	240 "	240 "	4 "	23.00	16.00
EC- 9	45 "	70 "	180 "	70 "	275 "	270 "	4 "	30.20	23.90
EC- 10	50 "	75 "	200 "	80 "	300 "	300 "	4 "	38.40	33.50
EC- 11	55 ±1.0	85 "	220 "	90 "	335 +5.5	330 +6.0	4 "	47.50	45.70
EC- 12	60 "	90 "	240 "	100 "	360 "	360 "	4 "	57.60	60.00
EC- 13	65 "	100 "	260 "	105 +1.0	395 "	390 "	4 "	65.50	74.50
EC- 14	70 "	110 "	280 "	110 "	430 "	420 "	4 "	73.90	91.10
EC- 15	80 "	120 "	320 "	120 "	480 "	480 "	4 "	92.20	128.00
EC- 16	90 "	140 "	360 "	130 "	550 "	540 "	4 "	112.00	177.00

※ご希望に応じた製品の製造が可能です。素材、形状、寸法をご指定ください。

